

ADDENDUM #02

August 17, 2026

Project: CAMPUS, WINDOWS & DOOR REPLACEMENT
WILDLAND FIRE RAPID CITY DISTRICT OFFICE
RAPID CITY, SOUTH DAKOTA
OSE# W2526--02X/SWMR

Bid Opening: August 20, 2026
02:00 PM CT

At: Office of the State Engineer
Joe Foss Building
523 East Capitol Avenue
Pierre, South Dakota 57501-3182

Owner: State of South Dakota, Department of Public Safety


Scope of this Addendum:

The following becomes a part of the original Project Manual, taking precedence over items that may conflict. The bidder shall note receipt and make acknowledgment of the addendum in their bid and incorporating its provisions in their bid price.

- Item No. 1 Clarification of 1" Insulating Laminated Glass - makeup shall be as follows:
- Outboard: ¼" Clear Low "e" (low "e" coating to be placed on surface #2) - tempered where required by code
 - Airspace: ½" argon
 - Inboard: ¼" clear laminated glass (.030 PVB inner layer)
- Item No. 2 See attached Pre-bid Meeting Minutes & Sign-in Sheet.
- Item No. 3 Install concrete stoop at door 110. Stoop to be approximately 4' wide by 6' long (3' on each side of the door). Stoop to be approximately 6" thick.
- Item No. 4 Door 110 shall be a Right-Hand Reverse Swing.
- Item No. 5 All garage doors - 108, 109, 115, 116, 117 - to have a single row of windows installed in the door. Match existing garage doors as shown next to door 111.

- Item No. 6 Clarification of material for door & frame for Door 101: Aluminum (see updated schedule)
- Item No. 7 Clarification of material for door & frame for Door 102: Hollow Metal (see updated schedule)
- Item No. 8 Correction of material for door & frame for Door 104: Aluminum (see updated schedule)
- Item No. 9 All doors with card access will require electrified hardware to accommodate the card access system - Doors 100, 102, 103, 105, 106, 107, 110, 111, 112, 113, 114

DOOR AND FRAME SCHEDULE																		
DOOR									FRAME						FIRE RATING	HARDWARE		NOTES
MARK	SIZE			MATL	EL	GLZ	LOUVER		MATL	EL	GL	DETAIL				SET NO	KEYSIDE RM NO	
	W	HT	THK				WT	HT				HEAD	JAMB	SILL				
100	6'	7'	0'-1 3/4"	AL	A	INSUL			AL	2	INSUL	4/602			26		SEE SPECIAL NOTE BELOW	
101	6'	7'	0'-1 3/4"	AL	H	INSUL			AL	4	1/4"	1/602			2		INT. ENTRANCE DOOR	
102	3'	7'	0'-1 3/4"	HM	D	EX			EX-HM	EX-HM		-			37		SEE SPECIAL NOTE BELOW	
103	3'	7'	0'-1 3/4"	AL	A	INSUL			AL	1	INSUL	4/602			37		ENTRANCE DOOR	
104	3'	7'	0'-1 3/4"	AL	B	1/4"			AL	1	1/4"	3/602			12		INT. ENTRANCE DOOR	
105	3'	7'	0'-1 3/4"	HM	F	INSUL			HM	3		5/602			37		EXIT DOOR	
106	3'	7'	0'-1 1/4"	HM		NONE						4/A-301			37			
107	3'	7'	0'-1 1/4"	HM		NONE						4/A-301			37			
110	3'	7'	0'-1 1/4"	HM		NONE									37			
NOTE: VERIFY MEASUREMENTS BEFORE ORDERING																		

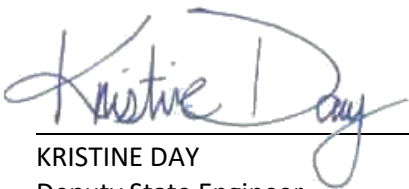

KRISTINE DAY
Deputy State Engineer
Office of the State Engineer



Meeting Minutes
W2526--02/SWMR
Campus, Windows & Door Replacement
Wildland Fire Rapid City District Office
Rapid City, SD

Pre-Bid Meeting, August 13, 2026, 9AM MT

Attendees:

Complete Contracting, Darren Britton

Architectural Specialties, Corey Crowder, Aaron Olson, & Joseph Wallner

Lloyd Construction, Jay Bestgen

SECO, Will Dyer

SD Overhead Doors, Scott McBee, John Bush

Wildland Fire, Joannah Tornow

OSE, Juli Hedrick

Door #110 will need a stoop installed with the door. Dimensions to be determined and stated in Addendum #2.

Door #110 will change to right-hand reverse swing and will be stated in Addendum #2.

All garage doors to have windows added to specs as requested by Owner to match overhead door next to door #111.

All Exterior doors will need electrified hardware as it was not stated in specs, will be updated in Addendum #2.